


BH-HTK

Heat shrink termination kit 1-36KV

Features/Applications:

BH-HTK heat shrink termination kit is available for indoor & outdoor applications for single core and 3-core XLPE & PILLC cables up to 36kV. The termination kit includes all the necessary components to make the installation.

- Simple and fast installation;
- One-piece design with integrated stress control;
- Offering protection against aging, tracking and erosion;
- High resistance to fungus, acid, alkalis and ozone;
- Accommodating a wide range of cable sizes.

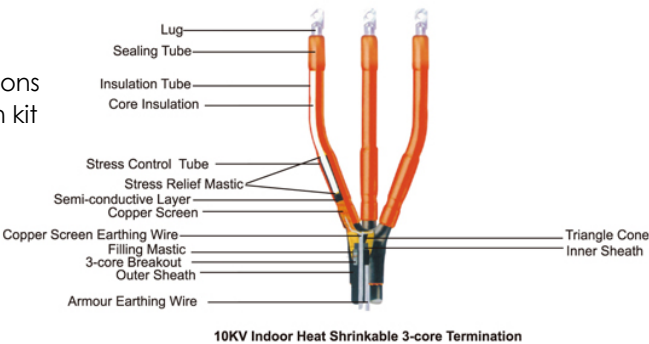

10KV Indoor Heat Shrinkable 3-core Termination

Product Specification

▶

| Voltage U0 /U (Um) | Cores | Cross Section/mm² | Product No. | |
|--------------------|---------------|-------------------|-------------------------------|--------------------------|
| | | | Indoor Termination | Outdoor Termination |
| 18/30kV(36) | 3,1 | 35-50 | 18/30kV BH-HTI-3/1(1/1) | 18/30kV BH-HTO-3/1(1/1) |
| | | 70-120 | 18/30kV BH-HTI-3/2(1/2) | 18/30kV BH-HTO-3/2(1/2) |
| | | 150-240 | 18/30kV BH-HTI-3/3(1/3) | 18/30kV BH-HTO-3/3(1/3) |
| | | 300-400 | 18/30kV BH-HTI-3/4(1/4) | 18/30kV BH-HTO-3/4(1/4) |
| | | 500-630 | 18/30kV BH-HTI-3/5(1/5) | 18/30kV BH-HTO-3/5(1/5) |
| 12/20kV(24) | 3,1 | 35-50 | 12/20kV BH-HTI-3/1(1/1) | 12/20kV BH-HTO-3/1(1/1) |
| | | 70-120 | 12/20kV BH-HTI-3/2(1/2) | 12/20kV BH-HTO-3/2(1/2) |
| | | 150-240 | 12/20kV BH-HTI-3/3(1/3) | 12/20kV BH-HTO-3/3(1/3) |
| | | 300-400 | 12/20kV BH-HTI-3/4(1/4) | 12/20kV BH-HTO-3/4(1/4) |
| | | 500-630 | 12/20kV BH-HTI-3/5(1/5) | 12/20kV BH-HTO-3/5(1/5) |
| 8.7/15kV(17.5) | 3,1 | 25-50 | 8.7/15kV BH-HTI-3/1(1/1) | 8.7/15kV BH-HTO-3/1(1/1) |
| | | 70-120 | 8.7/15kV BH-HTI-3/2(1/2) | 8.7/15kV BH-HTO-3/2(1/2) |
| | | 150-240 | 8.7/15kV BH-HTI-3/3(1/3) | 8.7/15kV BH-HTO-3/3(1/3) |
| | | 300-400 | 8.7/15kV BH-HTI-3/4(1/4) | 8.7/15kV BH-HTO-3/4(1/4) |
| | | 500-630 | 8.7/15kV BH-HTI-3/5(1/5) | 8.7/15kV BH-HTO-3/5(1/5) |
| 0.6/1kV(1.2) | 4, 5, 3, 2, 1 | 4-6 | 0.6/1kV BH-HT-4(5,3,2,1)/(-1) | |
| | | 10-16 | 0.6/1kV BH-HT-4(5,3,2,1)/0 | |
| | | 25-50 | 0.6/1kV BH-HT-4(5,3,2,1)/1 | |
| | | 70-120 | 0.6/1kV BH-HT-4(5,3,2,1)/2 | |
| | | 150-240 | 0.6/1kV BH-HT-4(5,3,2,1)/3 | |
| | | 300-400 | 0.6/1kV BH-HT-4(5,3,2,1)/4 | |